



UNIFLOOR

FLOORING AT ITS BEST

2024 CATALOGUE

Ideal Wood

Urban Genius Collection
Pacific Loft Collection
New Classic Collection
Ideal Classic Collection
Ideal Texture Collection

Euro Original

Roman Parquet Collection
Aqua Genius Collection
Swiss Aura Collection
Euro Loft Collection

AquaFix

Grand Cru Evolved Series
Grand Cru Series
Harmony Series
Harmony Evolved Series
Smart Tile Series
Grand Cru Chevron (WPC)
Harmony Elite Series
7th Heaven Series
Symphony Series
Royal Series
Dryback LVT Series
Luxury Vinyl Series

EC Premium

Natural Impact Collection



170-6333 Graybar Rd
Richmond BC, Canada



Tel: 604 276 0833
Fax: 604 276 0633
Toll Free: 1 888 540 0833



info@unifloor.ca
www.unifloor.ca



Thickness:	9/16" (14mm)
Width:	7-1/2" (189mm)
Length:	73" (1854mm) (Min. 75% full length plank)
Finish:	Ultra matte
Surface:	Light brushed
Package:	30.27 sqft/carton 45 cartons/pallet
Weight:	40 lb/carton

COLOURS



OAK, SAKURA



OAK, OASIS



OAK, VANCOUVER




EUROPEAN WALNUT



OAK, ALABASTER



OAK, CREAMA



OAK, BROOKLYN GREY



OAK, ORIGINAL



OAK, MONET




WALNUT, ROYAL

FEATURES



3mm Dry Solid Sawn Veneer


3mm dry solid sawn veneer



3-Ply Stable Core

3-ply stable core design

3-PLY CORE ENGINEERED STRUCTURE :

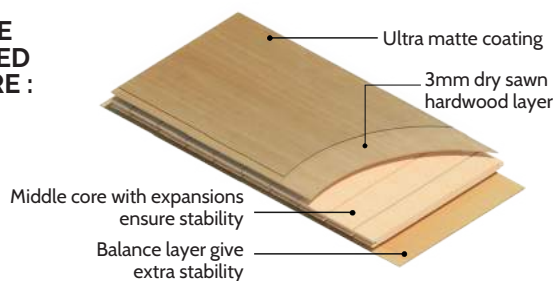


Authentic Touch

A true touch of natural wood



Underfloor Heating

Certified for underfloor heating system
*See installation manual for details



4 Sides Bevelled


4 sides micro bevelled





Thickness:	3/4" (18mm)
Width:	6 1/2" (165mm)
Length:	Random length up to 74.8" (1900mm) (50% full length plank)
Finish:	Ultra Matte
Surface:	Light brushed
Package:	20.25 sqft/carton 48 cartons/pallet
Weight:	22 kg/carton 48.5 lb/carton

COLOURS

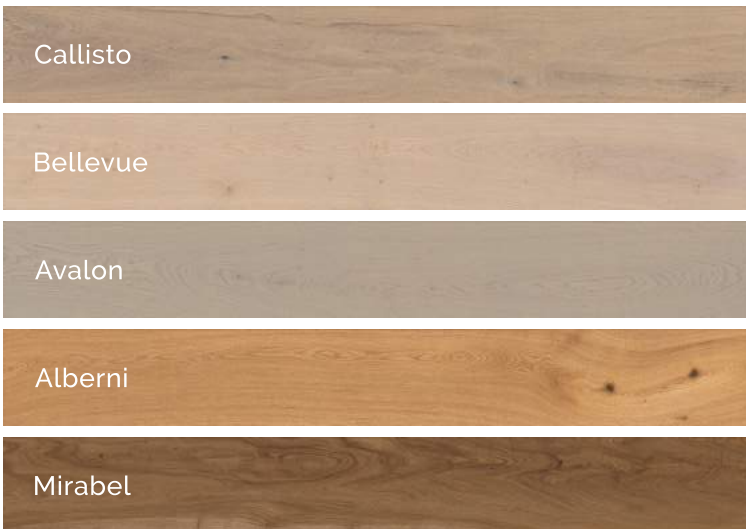

FEATURES



The most recognized Indoor Air Quality Certification



CA 93120 Phase 2 compliant for formaldehyde emission, EPA TSCA Title VI




Certified for underfloor heating system
*See installation manual for details



Lifetime structural warranty



Light brushed surface texture



4 sided micro bevelled




25 year limited residential wear warranty




3 year limited light commercial wear warranty

IDEAL WOOD

NEW CLASSIC COLLECTION

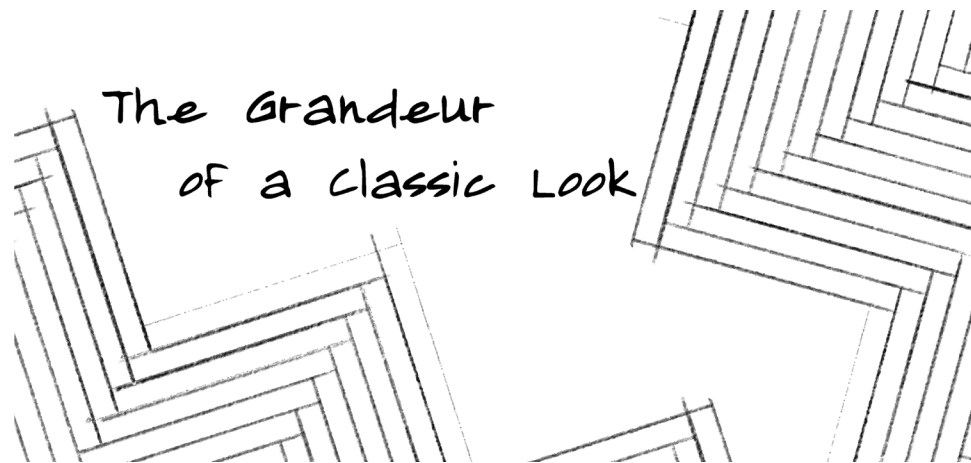

Thickness:	1/2" (12mm)
Width:	5" (127mm)
Length:	24" (600mm)
Finish:	Matte
Surface:	Light brushed
Package:	16.4 sqft/carton 64 cartons/pallet
Weight:	12.5 kg/carton 27.5 lb/carton



ALSACE




NAPA



CATALONIA



SAINT-EMILION




BURGUNDY




BAROSSA



VENETO



LAVAUX



PAUILLAC



OKANAGAN

FEATURES



The most recognized Indoor Air Quality Certification



CA 93120 Phase 2 compliant for formaldehyde emission, EPA TSCA Title VI




Certified for underfloor heating system
*See installation manual for details



Design for herringbone pattern installation



A true touch of natural wood



4 sided micro bevelled



25 year limited residential wear warranty



Lifetime structural warranty



Thickness:	1/2" (12mm)
Width:	6-1/2" (167mm)
Length:	48" (1210mm) (70% full length plank)
Finish:	Satin or matte
Surface:	Smooth or brushed
Package:	26.1 sqft/carton 36 cartons/pallet
Weight:	34.5 lb/carton


COLOURS



SURFACE:
SMOOTH

GLOSS LEVEL:
SATIN


FEATURES



Multi-ply stable core design



A true touch of natural wood



4 sides micro bevelled



Lifetime structural warranty



25 years limited residential wear warranty



6.5 inches wider board

MULTI-PLY CORE ENGINEERED STRUCTURE :





Thickness:	1/2" (12mm)
Width:	7" (178mm)
Length:	Random length up to 71" (1800mm) (Min. 50% full length plank)
Finish:	Matte
Surface:	Light brushed *Sawn mark on selected colours
Package:	20.69 sqft/carton 55 cartons/pallet
Weight:	16 kg/carton 35.27 lb/carton

COLOURS



CORNELL



BAYLOR



ORIGINAL



EMORY



CLEMSON



CARLETON



SATIN WHITE



PRINCETON



MASCARA



AUTHENTIC GREY

FEATURES



The most recognized Indoor Air Quality Certification



CA 93120 Phase 2 compliant for formaldehyde emission, EPA TSCA Title VI




Certified for underfloor heating system
*See installation manual for details



Lifetime structural warranty



Light brushed surface texture



4 sides micro bevelled



25 year limited residential wear warranty



3 year limited light commercial wear warranty




*Unleash
the Authentic
Roman Elegance...*




Thickness:	5/8" (15mm)
Width:	7-1/2" (192mm)
Length:	Up to 7.7' (2350mm) (70% full length plank)
Finish:	Ultra matte polyurethane with aluminum oxide
Surface:	Wire brushed
Package:	29.13 sqft/carton 50 cartons/pallet
Weight:	61 lb/carton

COLOURS



FEATURES

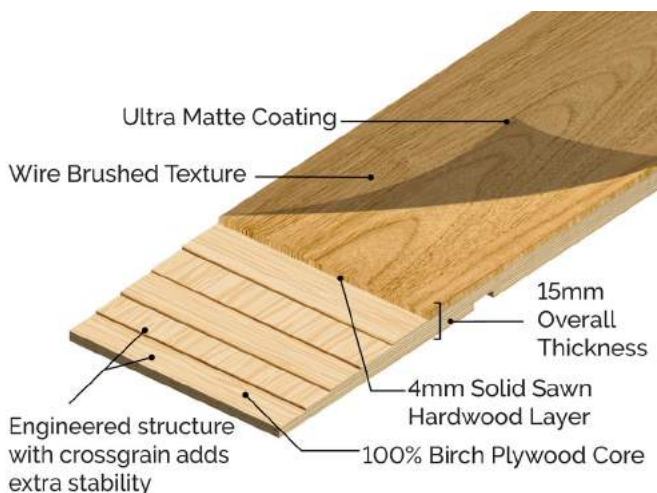


The formaldehyde emission standards for composite wood products act of 2010



4mm dry solid sawn hardwood layer



VOC Level on A+ scale from A+ to C
www.eurofins.com



70% full length planks

AQUA GENIUS

EUROoriginal®

The Water Resistant
Generation of
Laminate Flooring



Thickness:	0.32" (8mm)
Width:	7.6" (193mm)
Length:	54.45" (1383mm)
Finish:	Matte
Surface:	Registered embossed
Package:	25.86 sqft/carton 52 cartons/pallet
Weight:	37.9 lb/carton



QUITO




VALENCIA



CORDOBA



SANTIAGO



BRASILIA



SAO PAULO



ROSARIO



SALVADOR



LIMA



BOGOTA


EXPERIENCE MEETS INNOVATION - 100% MADE IN EUROPE



Advanced water-resistant HDF core, tested by NALFA surface water test.



AquaTec sealant on four edges to achieve better water resist performance.



Self-enclosed AquaTec angle & tap lock inhibits water penetration into the core, ensuring increased performance.





*Up to 72 hours surface top-down water resistance, with AquaTec HDF Core, edge sealant on four sides, self-enclosed lock.

*Visit www.euro-original.com for details.



A+ VOC level on scale from A+ to C
Details: www.eurofins.com




www.blauer-engel.de/uz176



Thickness:	1/2" (12 mm)
Width:	7.6" (193 mm)
Length:	54" (1380 mm)
Finish:	Ultra Matte
Surface:	Registered Embossed or Light Brushed
Package:	14.33 sqft / carton 60 cartons / pallet
Weight:	35.28 lb / Carton




QUALITY & INNOVATION MADE IN SWITZERLAND




Abrasive class 5, for intense use in residential and commercial areas



The most recognized Indoor Air Quality Certification



5G-easy fold down interlocking system



Declares the origin of the wood from Swiss forests and wood products from Swiss or Liechtenstein based companies



CA 93120 Phase 2 compliant for formaldehyde emission, EPA TSCA Title VI





Thickness:	3/8" (10mm)
Width:	7.6" (193mm)
Length:	54" (1380mm)
Finish:	Ultra Matte
Surface:	Light Brushed
Package:	20.06 sqft/carton 56 cartons/pallet
Weight:	35.28 lb/carton



ALPS



CASA MILA



ROSA



NEW CLASSIC



MOZART




PICASSO




TOKYO

QUALITY & INNOVATION MADE IN EUROPE




Class 32 / AC4

Abrasive class 4, for intense use in residential and commercial areas with normal traffic intensity



Drop Lock

5G-easy fold down interlocking system



4 Sided Bevelled

4 sided micro bevelled



Underfloor Heating

Certified for underfloor heating system.
*See installation manual for details



A+ VOC level on scale from A+ to C
Details: www.eurofins.com



The most recognized Indoor Air Quality Certification


















Thickness:	5/16" (8mm) overall 1.5mm pad attached
Wear layer:	20mil (0.5mm)
Width:	9" (230mm)
Length:	71" (1800mm)
Finish:	Matte
Surface:	Registered embossed
Package:	17.83 sqft/carton 52 cartons/pallet
Weight:	22.5 kg/carton 49.6 lb/carton

COLOURS



FEATURES

 <p>x8 8 pattern rotation enables an authentic natural wood look</p>	 <p>Authentic touch Registered embossed texture</p>	 <p>Extra core thickness allows better comfort underfoot and performance</p>
 <p>4 4-sided painted micro v-bevels create real parquet look</p>	 <p>Pet friendly</p>	 <p>Formaldehyde free & phthalates free</p>
 <p>100% waterproof flooring</p>	 <p>Ultra low VOCs</p>	 <p>Lifetime limited residential wear warranty</p>
 <p>1.5mm pad attached</p>	 <p>Certified for underfloor heating system <i>*See installation manual for details</i></p>	 <p>15 year limited commercial wear warranty</p>
 <p>One of the most sophisticated fold-down style interlocking</p>	 <p>A+ VOC level on scale from A+ to C Details: www.eurofins.com</p>	 <p>The most recognized Indoor Air Quality Certification</p>




Thickness:	1/4" (6.5mm) overall 1.5mm pad attached
Wear layer:	20mil (0.5mm)
Width:	9" (230mm)
Length:	71" (1800mm)
Finish:	Matte
Surface:	Registered embossed
Package:	22.28 sqft/carton 56 cartons/pallet
Weight:	21.5 kg/carton 47 lb/carton

COLOURS



FEATURES




4-sided painted micro v-bevels create real parquet look



100% waterproof flooring



1.5mm pad attached



Easiest fold-down inter-locking system



Authentic touch
Registered embossed texture



Formaldehyde free & phthalates free



Ultra low VOCs



Certified for underfloor heating system



Lifetime limited residential wear warranty



15 year limited commercial wear warranty




Thickness:	1/4"(6.5mm) overall 1.5mm pad attached
Wear layer:	12mil (0.3mm)
Width:	7 1/4" (183mm)
Length:	48" (1220mm)
Finish:	Matte
Surface:	Light brushed
Package:	19.22 sqft/carton 55 cartons/pallet
Weight:	19 kg/carton 42 lb/carton

COLOURS



FEATURES




4-sided painted micro v-bevels create real parquet look



100% waterproof flooring



Pets welcome



Easiest fold-down inter-locking system



Light brushed texture embossed surface



Formaldehyde free & phthalates free



Ultra low VOCs



Certified for underfloor heating system



Lifetime limited residential wear warranty



10 year limited commercial wear warranty





Thickness: 1/4" (6.5mm) overall

Width: 8 5/8" (220 mm)

Length: 59 1/2" (1510mm)

Finish: Matte

Surface: Light Brush

Texture Embossed

Package: 21.45 sqft/carton

48 cartons/pallet

Weight: 45.53 lb/carton

20.65 kg/carton



TULIP



DAISY



LILY



CHAMOMILE



IRIS



LAVENDER




BLUEBELL



CARNATION



MARIGOLD




PEONY

A WATERPROOF EVOLUTION



100% waterproof flooring




4-sided painted micro v-bevels create real parquet look



Ultra low VOCs



1.5mm pad attached



Formaldehyde free & phthalates free



Lifetime limited residential wear warranty
*Limited conditions apply



Uniclic® click system



Pet friendly



10 years limited commercial wear warranty
*Limited conditions apply



Light Brush Texture Embossed Surface




Certified for underfloor heating system

*See installation manual for details



The most recognized Indoor Air Quality Certification

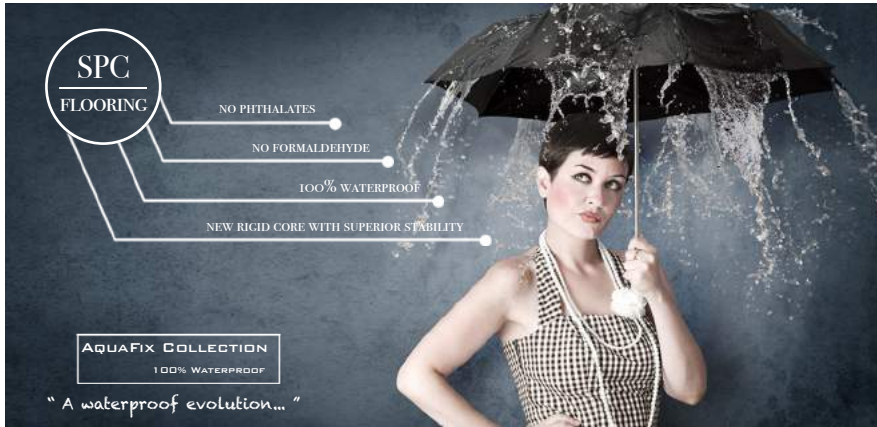

Thickness: 1/4"(6.5mm) overall
1.5mm pad attached

Wear Layer: 20mil (0.5mm)

Width: 12" (305 MM)

Length: 24" (610MM)

Finish: Matte

Surface: Concrete texture embossed

Package: 20 sqft/carton
48 cartons/pallet

Weight: 41.89 lb/carton



BIANCO CARRARA



DOVE NOVA



MICABELLA



CLASSICO CARRARA



LIMESTONE



LOFT



CONCRETE



ONYX



MILANO



NERO

FEATURES



4-sided unilin grout line technology creating an authentic tile look



100% waterproof flooring



1.5mm pad attached



Uniclic® click system



Concrete texture embossed surface



Pet friendly



Formaldehyde free & phthalates free



Ultra low VOCs



Certified for underfloor heating system
*See installation manual for details



Lifetime limited residential wear warranty
*Limited conditions apply




10 year limited commercial wear warranty
*Limited conditions apply



The most recognized Indoor Air Quality Certification.

AQUAFIX COLLECTION

GRAND CRU CHEVRON (WPC)

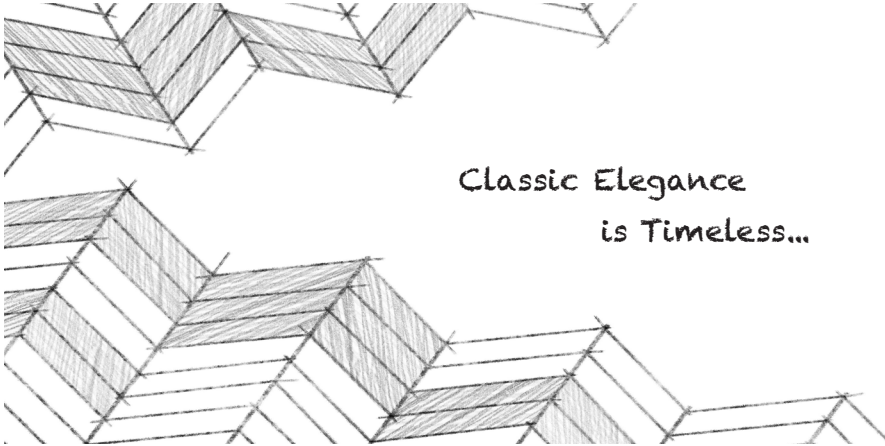

Classic Elegance
is Timeless...

Thickness: 5/16" (8mm) overall
1.5mm pad attached

Width: 12" (305 mm)

Length: 28 1/4" (718mm)

Finish: Matte

Surface: Register Embossed Texture

Package: 8 pcs/box

56 boxes/pallet

Weight: 33.20 lb/carton

15.06 kg/box



CHAMBERTIN
(CHEVRON)



SAINT-PIERRE
(CHEVRON)



LARROSE
(CHEVRON)



LASCOMBES
(CHEVRON)



BARTON
(CHEVRON)



ROCHEBELLE
(CHEVRON)



CHAUVIN
(CHEVRON)



CORBIN
(CHEVRON)



MONTLISSÉ
(CHEVRON)



LE GAY
(CHEVRON)

FEATURES




Design for chevron
pattern installation



Certified for underfloor
heating system
*See installation manual for details



100% waterproof flooring



4-sided painted micro
v-bevels create real
parquet look



1.5mm pad attached



Formaldehyde free
& phthalates free



One of the most
sophisticated fold-down
style interlocking system




Authentic touch
registered embossed



Pet friendly




Ultra low VOCs

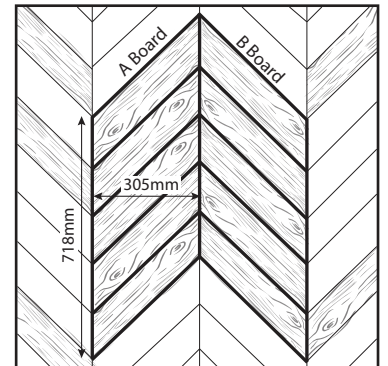

Lifetime limited residential
wear warranty
*Limited conditions apply



10 years limited
commercial wear warranty
*Limited conditions apply

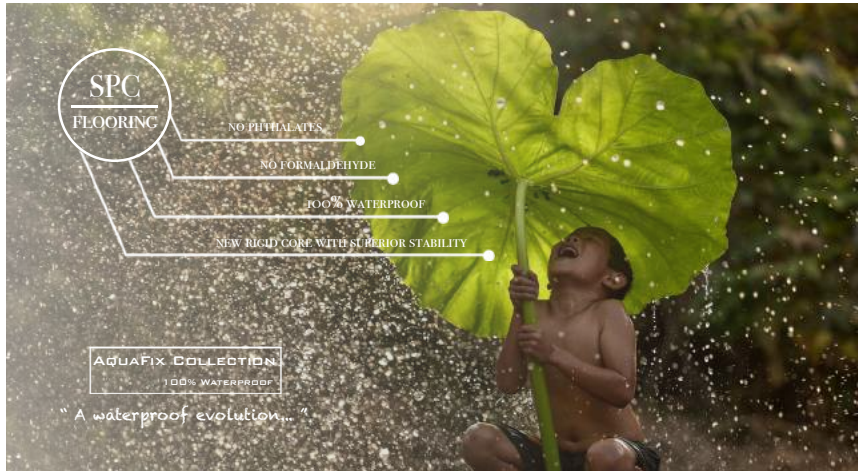

Thickness:	1/4"(6.5mm) overall 1.5mm pad attached
Wear layer:	12mil (0.3mm)
Width:	7 1/4" (183mm)
Length:	48" (1220mm)
Finish:	Matte
Surface:	Light brushed
Package:	19.22 sqft/carton 55 cartons/pallet
Weight:	19 kg/carton 42 lb/carton

COLOURS

ALLEGRO

ADAGIO


FORTE

TEMPO

LEGATO

STACCATO

FEATURES



4-sided painted micro v-bevels create real parquet look



Formaldehyde free & phthalates free




100% waterproof flooring



Ultra low VOCs



Pets welcome



Certified for underfloor heating system



One of the most sophisticated angle/ angle locking system



Lifetime limited residential wear warranty



Light brushed texture embossed surface



10 year limited commercial wear warranty

7TH HEAVEN SERIES



Thickness:	1/2" (12mm)
Width:	7 3/4" (195mm)
Length:	59 7/16" (1515mm)
Finish:	Matte
Surface:	EIR Surface
Package:	22.25 sqft/carton 50 cartons/pallet
Weight:	48.5 lb/carton

GARIBALDI	FURRY CREEK
LAKE SARAH	PANORAMA
LOST LAKE	ALTA LAKE
BRITANNIA BEACH	EMERALD RIDGE
SHANNON FALLS	BRANDYWINE FALLS

THE WATER RESISTANT GENERATION OF LAMINATE FLOORING




Advanced water-resistant HDF core, tested by Benchmark International surface water test.




AquaFix sealant on four edges to achieve better water resist performance.



*Up to 100 hours surface top-down water resistance, with AquaFix HDF Core, edge sealant on four sides, self-enclosed lock.
*Visit www.unifloor.ca for details.




Easiest fold down interlocking system



Abrasive Class 4, for intense use in habitable rooms with high traffic intensity, public utility with normal traffic intensity.



True Touch synchronized grain texture, reveals the authentic look of real wood.



SYMPHONY SERIES



The Water Resistant Generation of Laminate Flooring



Thickness:	1/2" (12mm)
Width:	7 3/4" (196mm)
Length:	72" (1830mm)
Finish:	Matte
Surface:	EIR Surface
Package:	23.16 sqft/carton 40 cartons/pallet
Weight:	50.7 lb/carton

ARIA	LARGO
BALLAD	NOCTURNE
CAPRICCIO	OPUS
CHROMATIC	OCTAVE
CONCERTO	SONATA

THE WATER RESISTANT GENERATION OF LAMINATE FLOORING




Advanced water-resistant HDF core, tested by Benchmark International surface water test.




AquaFix sealant on four edges to achieve better water resist performance.



*Up to 100 hours surface top-down water resistance, with AquaFix HDF Core, edge sealant on four sides, self-enclosed lock. *Visit www.unifloor.ca for details.




Easiest fold down interlocking system



Abrasive Class 4, for intense use in habitable rooms with high traffic intensity, public utility with normal traffic intensity.



True Touch synchronized grain texture, reveals the authentic look of real wood.



ROYAL SERIES



The Water Resistant
Generation of
Laminate Flooring

AQUAFIX®

Thickness:	1/2" (12mm)
Width:	9 7/16" (239mm)
Length:	86 5/8" (2200mm)
Finish:	Matte
Surface:	EIR Surface
Package:	22.64 sqft/carton 44 cartons/pallet
Weight:	50.5 lb/carton



ELIZABETH



PHILIP



ANNE



WILLIAM



KATE



HARRY



MEGHAN



CHARLES



DIANA



ANDREW

THE WATER RESISTANT GENERATION OF LAMINATE FLOORING



Advanced water-resistant HDF core, tested by Benchmark International surface water test.




AquaFix sealant on four edges to achieve better water resist performance.



*Up to 100 hours surface top-down water resistance, with AquaFix HDF Core, edge sealant on four sides, self-enclosed lock.
*Visit www.unifloor.ca for details.




One of the most sophisticated fold-down style interlocking system.




Abrasive Class 4, for intense use in habitable rooms with high traffic intensity, public utility with normal traffic intensity.



True Touch synchronized grain texture, reveals the authentic look of real wood.




SUPERIOR STABILITY & FLEXIBILITY
WITH HIGH-QUALITY MULTILAYER
LVT / FIBERGLASS ENGINEERING

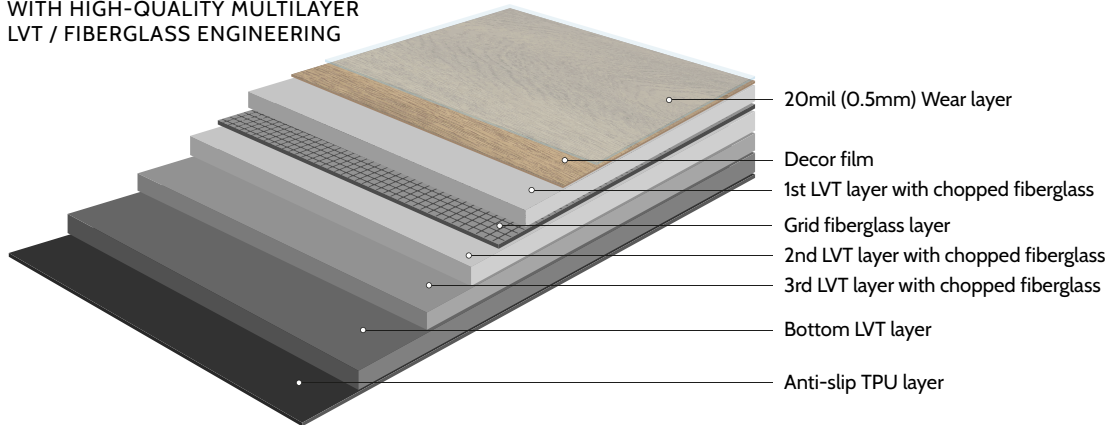

Wood Pattern Plank

- Dimension** 7" x 48" x 2.5/0.5mm
177.8mm x 1219.2mm x 2.5/0.5mm
- Wear layer** 20mil (0.5mm)
- Surface** Light brushed
- Package** 37.33 sqft/carton
75 cartons/pallet
- Weight** 15.67 kg/carton
34.55 lb/carton

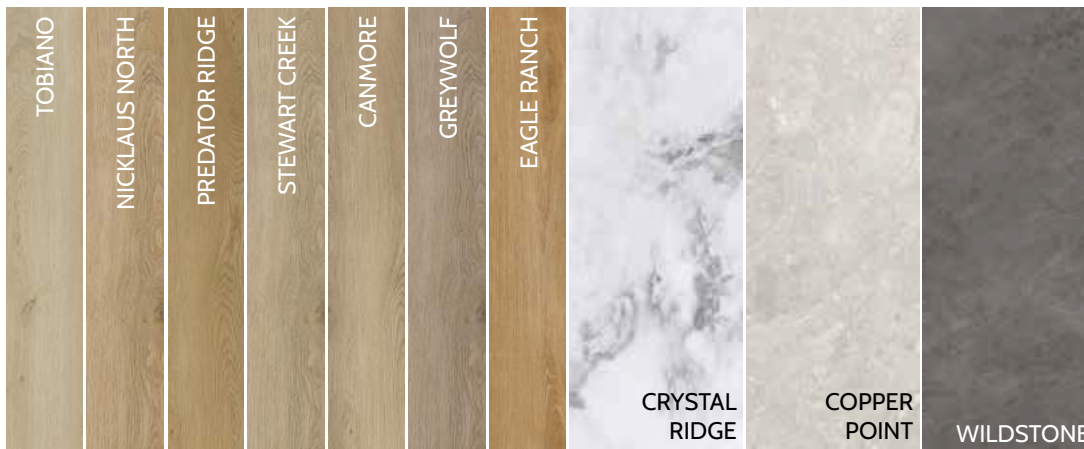


Tile Pattern Plank

- Dimension** 12" x 24" x 2.5/0.5mm
304.8mm x 609.6mm x 2.5/0.5mm
- Wear layer** 20mil (0.5mm)
- Surface** Coral embossed surface
- Package** 36 sqft/carton
66 cartons/pallet
- Weight** 15.1 kg/carton
33.3 lb/carton

4 Sided Bevelled	4-sided micro bevels create real parquet look	Superior Flexibility	Superior flexibility	No Formaldehyde	Formaldehyde free & phthalates free	30 YEARS Residential Warranty	30 year limited residential wear warranty
Waterproof	100% waterproof flooring	Fast Repairs	Easy repairs	Pet Friendly	Pet friendly	15 YEARS Commercial Warranty	15 year limited commercial wear warranty
Light Brushed	Light brushed texture embossed surface, matte finish	Comfort Walk	Excellent underfoot comfort	Underfloor Heating	Certified for underfloor heating system <i>*See installation manual for details</i>	floor score	The most recognized Indoor Air Quality Certification

Characteristics	Test requirements	Test Method	Verdict
Size, tolerance	A tolerance of ±0.4mm/305mm	ASTM F2055-17(2021)	Pass
Thickness, product	A tolerance of ±0.13mm	ASTM F386-17	Pass
Thickness, wear layer	Commercial, 0.5mm min	ASTM F410-08(2017)	Pass
Squareness	≤ 0.25mm	ASTM F2055-17(2021)	Pass
Residual indentation	Average < 8% Max. ≤ 10%	ASTM F1914-18	Pass
Flexibility	No crack or break when using Ø25.4mm mandrel	ASTM F137-08(2018)	Pass
Dimensional stability	≤ 0.51mm/305mm (0.17%)	ASTM F2199-20	Pass
Resistance to chemicals	No more than a slight change in surface dulling, surface attack, or staining	ASTM F925-13(2020)	Pass
Resistance to light	(avg, max) ΔE* <8	ASTM F1515-21	Pass
Resistance to heat	(avg, max) ΔE* <8	ASTM F1514-19	Pass

SUPERIOR STABILITY & FLEXIBILITY
WITH HIGH-QUALITY MULTILAYER
LVT / FIBERGLASS ENGINEERING

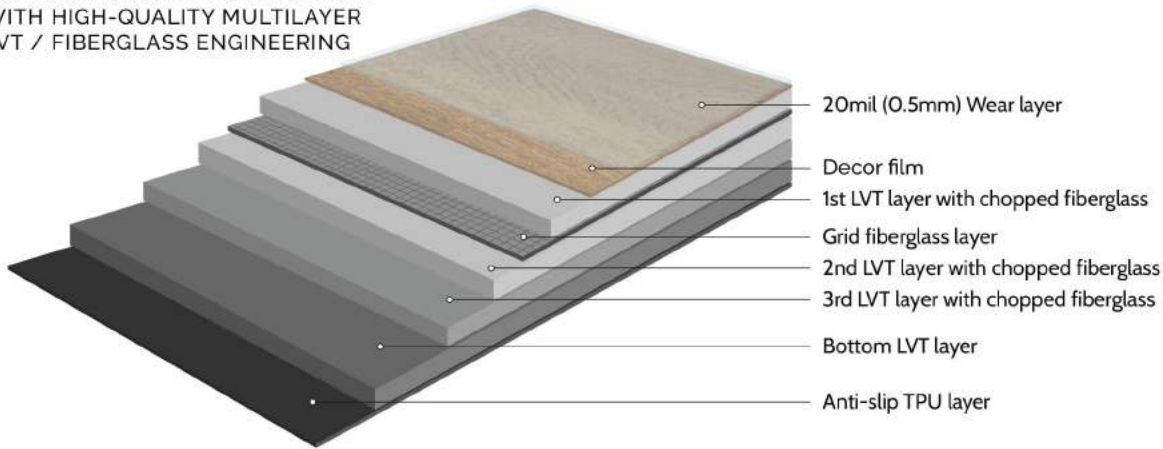


Thickness:	3/16" (5mm)
Wear layer:	20mil (0.5mm)
Width:	9" (228.6mm)
Length:	60" (1524mm)
Finish:	Matte
Surface:	Light brushed
Package:	22.5 sqft/carton 40 cartons/pallet
Weight:	22 kg/carton 48.5 lb/carton

COLOURS



FEATURES



4-sided micro bevels create real parquet look



100% waterproof flooring



Light brushed texture embossed surface



Superior flexibility



Easy repairs



Excellent underfoot comfort



Formaldehyde free & phthalates free



1.5mm pad attached (STC: 62, IIC: 63)



Pet friendly



Certified for underfloor heating system
*See installation manual for details



30 years limited residential wear warranty



15 years limited commercial wear warranty



SPC FLOORING TECHNICAL DATA

Technical Characteristic	Standards	Test Method	Verdict
Size, tolerance	A tolerance of $\pm 0.4\text{mm}/305\text{mm}$	ASTM F2055-17(2021)	Pass
Thickness, product	A tolerance of $\pm 0.13\text{mm}$	ASTM F386-17	Pass
Thickness, wear layer	Commercial, 0.5mm min	ASTM F410-08(2017)	Pass
Squareness	$\leq 0.25\text{mm}$	ASTM F2055-17(2021)	Pass
Residual indentation	Average $< 8\%$ Max. $\leq 10\%$	ASTM F1914-18	Pass
Flexibility	No crack or break when using $\Phi 25.4\text{mm}$ mandrel	ASTM F137-08(2018)	Pass
Dimensional stability	$\leq 0.51\text{mm}/305\text{mm}$ (0.17%)	ASTM F2199-20	Pass
Resistance to chemicals	No more than a slight change in surface dulling, surface attack, or staining	ASTM F925-13(2020)	Pass
Resistance to light	(avg, max) $\Delta E^* < 8$	ASTM F1515-21	Pass
Resistance to heat	(avg, max) $\Delta E^* < 8$	ASTM F1514-19	Pass
Effect of Castor Chair	Rotation frequency: 60r/min Abrasive wheels: CS-17 Load on each wheel: 1000g Test revolutions: 1000r	-	Pass
Abrasion/ Wear resistance	-	ASTM D4060-19	60mg
Fungi Resistance	-	ASTM G21-15	Rating 0, None growth
Heavy Metal	-	ASTM F963-17	Not Detected (less than the detection limit)
Phthalate Content Test (DBP/DEHP/BBP/DINP/DIBP/ DPENP/DHEXP/DCHP)	-	CPSC-CH-C1001-09.4	Not Detected (less than the detection limit)
Acoustic Impact Noise Recuction	-	ASTM E90-09 (R2016), ASTM E492-09 (R2016)	STC 62 / IIC 63
Thermal Conductivity	-	ASTM C518-21	0.139 W(m.K)
Thermal Resistance	-	-	0.036 (m ² .K)/W
Specific Optical Density of Smoke	-	ASTM E662	< 450
Critical Radiant Flux	-	ASTM E648/ NFPA classification	Class 1



THICKNESS:	1/2" (12.3MM)
WIDTH:	6-1/2" (165MM)
LENGTH:	48" (1215MM)
FINISH:	SEMI-GLOSS
SURFACE:	NATURAL WOOD GRAIN EMBOSSED
PACKAGE:	23.74 SQFT/CARTON 42 CARTONS/PALLET
WEIGHT:	48 LB/CARTON

COLOURS



FEATURES



4 SIDES MICRO BEVELLED



25 YEARS LIMITED RESIDENTIAL WEAR WARRANTY
5 YEARS LIMITED COMMERCIAL WEAR WARRANTY



FORMALDEHYDE CLASS E1:
≤ 0.124 MG/M³ AIR
TESTED BY SGS-CSTC STANDARDS TECHNICAL SERVICES




EASIEST FOLD DOWN INTER-LOCKING SYSTEM



ANTI BACTERIAL COATING



ABRASSIVE CLASS 3



12MM HDF CORE



CERTIFIED FOR UNDERFLOOR HEATING SYSTEM

