



UNIFLOOR
FLOORING AT ITS BEST

2025 PRODUCT SPEC SHEET

Ideal Wood

Urban Genius Collection
Pacific Loft Collection
New Classic Collection
Ideal Classic Collection
Ideal Texture Collection
Prestige Plank-Select Grade

Euro Original

Euro Essential Collection
Aqua Genius Collection
Swiss Aura Collection
Euro Loft Collection

AquaFix

Harmony Series
Harmony Evolved Series
Harmony Elite Series
Signature Select Series
Grand Cru Series
Grand Cru Evolved Series
Grand Cru Chevron (WPC)
Smart Tile Series
Luxury Vinyl Series
Dryback LVT Series
Dryback 2.0 Series
7th Heaven Series
Symphony Series
Royal Series

EC Premium

Natural Impact Collection



170-6333 Graybar Rd
Richmond BC, Canada



Tel: 604 276 0833
Fax: 604 276 0633
Toll Free: 1 888 540 0833




info@unifloor.ca
www.unifloor.ca




Thickness:	9/16" (14mm)
Width:	7-1/2" (189mm)
Length:	73" (1854mm) (Min. 75% full length plank)
Finish:	Ultra matte
Surface:	Light brushed
Package:	30.27 sqft/carton 45 cartons/pallet
Weight:	40 lb/carton


COLOURS




OAK, SAKURA




OAK, OASIS




OAK, VANCOUVER




EUROPEAN WALNUT




OAK, ALABASTER




OAK, CREAMA




OAK, BROOKLYN GREY



OAK, ORIGINAL



OAK, MONET




WALNUT, ROYAL

FEATURES



3mm Dry Solid Sawn Veneer

3mm dry solid sawn veneer



3-Ply Stable Core

3-ply stable core design




Authentic Touch

A true touch of natural wood



Underfloor Heating


Certified for underfloor heating system
*See installation manual for details



4 Sides Bevelled

4 sides micro bevelled



3-PLY CORE ENGINEERED STRUCTURE :

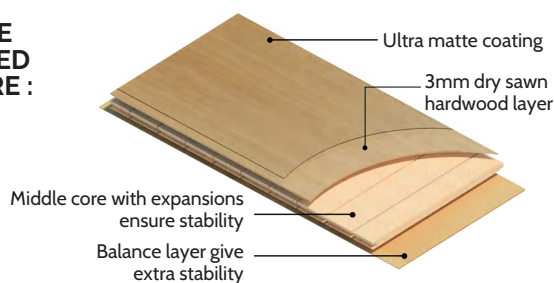



Thickness:	3/4" (18mm)
Width:	6 1/2" (165mm)
Length:	Random length up to 74.8" (1900mm) (50% full length plank)
Finish:	Ultra Matte
Surface:	Light brushed
Package:	20.25 sqft/carton 48 cartons/pallet
Weight:	22 kg/carton 48.5 lb/carton

COLOURS

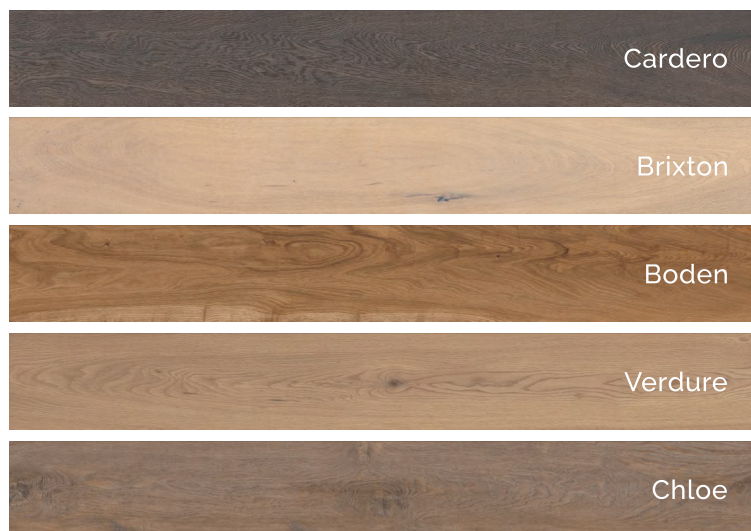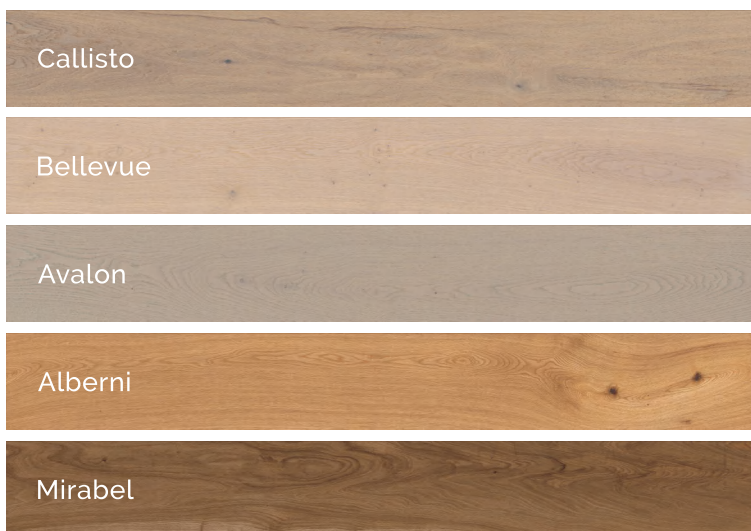

FEATURES



The most recognized Indoor Air Quality Certification



CA 93120 Phase 2 compliant for formaldehyde emission, EPA TSCA Title VI




Certified for underfloor heating system
*See installation manual for details



Lifetime structural warranty



Light brushed surface texture



4 sided micro bevelled



25 year limited residential wear warranty




3 year limited light commercial wear warranty

IDEAL WOOD


NEW CLASSIC COLLECTION

The Grandeur
of a classic Look


Thickness:	1/2" (12mm)
Width:	5" (127mm)
Length:	24" (600mm)
Finish:	Matte
Surface:	Light brushed
Package:	16.4 sqft/carton 64 cartons/pallet
Weight:	12.5 kg/carton 27.5 lb/carton




ALSACE



NAPA



CATALONIA



SAINT-EMILION




BURGUNDY




BAROSSA




VENETO



LAVAUX



PAUILLAC



OKANAGAN

FEATURES



The most recognized Indoor Air Quality Certification



CA 93120 Phase 2 compliant for formaldehyde emission, EPA TSCA Title VI




Certified for underfloor heating system
*See installation manual for details



Design for herringbone pattern installation



A true touch of natural wood



4 sided micro bevelled



25 year limited residential wear warranty




Lifetime structural warranty



Thickness:	1/2" (12mm)
Width:	6-1/2" (167mm)
Length:	48" (1210mm) (70% full length plank)
Finish:	Satin or matte
Surface:	Smooth or brushed
Package:	26.1 sqft/carton 36 cartons/pallet
Weight:	34.5 lb/carton


COLOURS

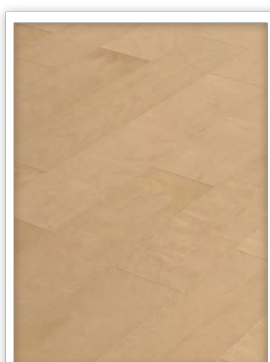


MAPLE, CLASSIC



MAPLE, MACCHIATO

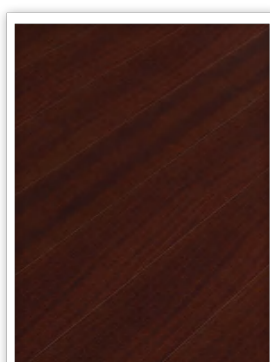

SAPELE, LEATHER

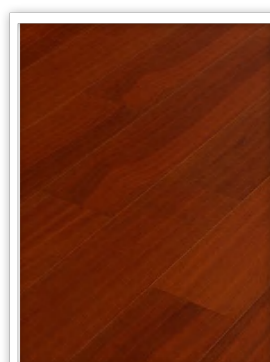


SAPELE,
TROPICAL CLASSIC

SURFACE:
SMOOTH

GLOSS LEVEL:
SATIN


FEATURES



Multi-ply stable core design



A true touch of natural wood



4 sides micro bevelled



Lifetime structural warranty



25 years limited residential wear warranty



6.5 inches wider board


MULTI-PLY CORE
ENGINEERED
STRUCTURE :






Thickness:	1/2" (12mm)
Width:	7" (178mm)
Length:	Random length up to 71" (1800mm) (Min. 50% full length plank)
Finish:	Matte
Surface:	Light brushed *Sawn mark on selected colours
Package:	20.69 sqft/carton 55 cartons/pallet
Weight:	16 kg/carton 35.27 lb/carton


COLOURS




CORNELL




BAYLOR



ORIGINAL




EMORY




CLEMSON




CARLETON




SATIN WHITE



PRINCETON



MASCARA



AUTHENTIC
GREY

FEATURES



The most recognized Indoor Air Quality Certification



CA 93120 Phase 2 compliant for formaldehyde emission, EPA TSCA Title VI




Certified for underfloor heating system
*See installation manual for details



Lifetime structural warranty



Light brushed surface texture



4 sides micro bevelled



25 year limited residential wear warranty



3 year limited light commercial wear warranty



Thickness:	9/16" (14mm)
Width:	7 1/2" (190mm)
Length:	Random length up to 74 4/5" (1900mm) (50%+ full length plank)
Finish:	Ultra Matte
Surface:	Light brushed
Package:	23.32 sqft/carton 55 cartons/pallet
Weight:	44 lb/carton

COLOURS



Oak Davos



Oak Luzern



Oak Montreal



Oak Vita



Oak Manhattan



Oak Montara

FEATURES



2mm Select Grade
Hardwood Top Layer




100% Select Grade Wood Veneer



Certified for underfloor heating system
*See installation manual for details



A true touch of natural wood, with
authentic Light Brushed texture



4 sided micro bevelled



50%+ Full Length Planks



Ultra Matte Finish



Lifetime structural warranty



25 year limited residential wear warranty
*Limited conditions apply



3 year limited light
commercial wear warranty
*Limited conditions apply



The most recognized Indoor Air
Quality Certification



CA 93120 Phase 2 compliant for
formaldehyde emission,
EPA TSCA Title VI



EL'original®

Thickness: 0.32" (8mm)

Width: 7.6" (193mm)

Length: 54.45" (1383mm)

Finish: Matte

Surface: Registered embossed / Light Brushed

Package: 25.86 sqft/carton
9 pcs / carton
52 cartons/pallet

Weight: 35.3 lb/carton



Torino Oak



Vienna Oak




Salzburg Oak



Lisbon Oak

EXPERIENCE MEETS INNOVATION - 100% MADE IN EUROPE



Class 32 / AC4

Abrasive Class 4, for intense use in habitable rooms with high traffic intensity, public utility with normal traffic intensity.



True Touch

True Touch synchronized grain texture, reveals the authentic look of real wood.



Angle Angle

One of the most sophisticated angle / angle locking system



CARB PHASE 2 COMPLIANT

The formaldehyde emission standards for composite wood products. Visit www.epa.gov for details



A+ VOC Level

A+ VOC level on scale from A+ to C
Details: www.eurofins.com




Wood Based



5 YEARS
Light Commercial
Warranty



3 YEARS
Residential
Warranty



4
4 Sided Bevelled



Underfloor
Heating



E1
HCHO



EPLF
MADE WITH WOOD




PEFC
PEFC/06-35-18




www.blauer-engel.de/uz176




Thickness:	0.32" (8mm)
Width:	7.6" (193mm)
Length:	54.45" (1383mm)
Finish:	Matte
Surface:	Registered embossed
Package:	25.86 sqft/carton
	52 cartons/pallet
Weight:	37.9 lb/carton




QUITO




VALENCIA




CORDOBA




SANTIAGO




BRASILIA




SAO PAULO




ROSARIO



SALVADOR



LIMA



BOGOTA

EXPERIENCE MEETS INNOVATION - 100% MADE IN EUROPE




AquaTec HDF

Advanced water-resistant HDF core, tested by NALFA surface water test.



AquaTec Edge

AquaTec sealant on four edges to achieve better water resist performance.



AquaTec Lock

Self-enclosed AquaTec angle & tap lock inhibits water penetration into the core, ensuring increased performance.



Water Resistant
*UP TO 72 HRS

*Up to 72 hours surface top-down water resistance, with AquaTec HDF Core, edge sealant on four sides, self-enclosed lock.

*Visit www.euro-original.com for details.



A+ VOC Level

A+ VOC level on scale from A+ to C
Details: www.eurofins.com



True Touch




Wood Based




5 YEARS
Light Commercial
Warranty



30 YEARS
Residential
Warranty



4
4 Sided Bevelled



Class 33 / AC 5



Underfloor
Heating



E1
HCHO



EPLF
MADE WITH WOOD



CARB
PHASE 2
COMPLIANT



PEFC
PEFC/O6-35-18



BLAUER ENGEL
DAS UMWELTZEICHEN

www.blauer-engel.de/uz176




EL'original® 

Thickness:	1/2" (12 mm)
Width:	7.6" (193 mm)
Length:	54" (1380 mm)
Finish:	Ultra Matte
Surface:	Registered Embossed or Light Brushed
Package:	14.33 sqft / carton 60 cartons / pallet
Weight:	35.28 lb / Carton




QUALITY & INNOVATION MADE IN SWITZERLAND



Abrasive class 5, for intense use in residential and commercial areas



The most recognized Indoor Air Quality Certification




5G-easy fold down interlocking system



Declares the origin of the wood from Swiss forests and wood products from Swiss or Liechtenstein based companies



CA 93120 Phase 2 compliant for formaldehyde emission, EPA TSCA Title VI





EURO[®]original[®]

Thickness:	3/8" (10mm)
Width:	7.6" (193mm)
Length:	54" (1380mm)
Finish:	Ultra Matte
Surface:	Light Brushed
Package:	20.06 sqft/carton
	56 cartons/pallet
Weight:	35.28 lb/carton



ALPS



CASA MILA



ROSA




NEW CLASSIC



MOZART




PICASSO




TOKYO

QUALITY & INNOVATION MADE IN EUROPE




Class 32 / AC4

Abrasive class 4, for intense use in residential and commercial areas with normal traffic intensity



Drop Lock

5G-easy fold down interlocking system



4 Sided Bevelled

4 sided micro bevelled



Underfloor Heating

Certified for underfloor heating system.
*See installation manual for details



A+ VOC level on scale from A+ to C
Details: www.eurofins.com



The most recognized Indoor Air Quality Certification






Thickness:	1/4" (6.5mm) overall 1.5mm pad attached
Wear layer:	12mil (0.3mm)
Width:	7 1/4" (183mm)
Length:	48" (1220mm)
Finish:	Matte
Surface:	Light brushed
Package:	19.22 sqft/carton 55 cartons/pallet
Weight:	19 kg/carton 42 lb/carton

COLOURS



FEATURES



4-sided painted micro v-bevels
create real parquet look



100% waterproof flooring



Pets welcome



One of the most sophisticated
fold-down style interlocking
system



Light brushed texture embossed
surface



Formaldehyde free
& phthalates free



Ultra low VOCs




Certified for underfloor
heating system



Lifetime limited residential wear
warranty



10 year limited commercial wear
warranty

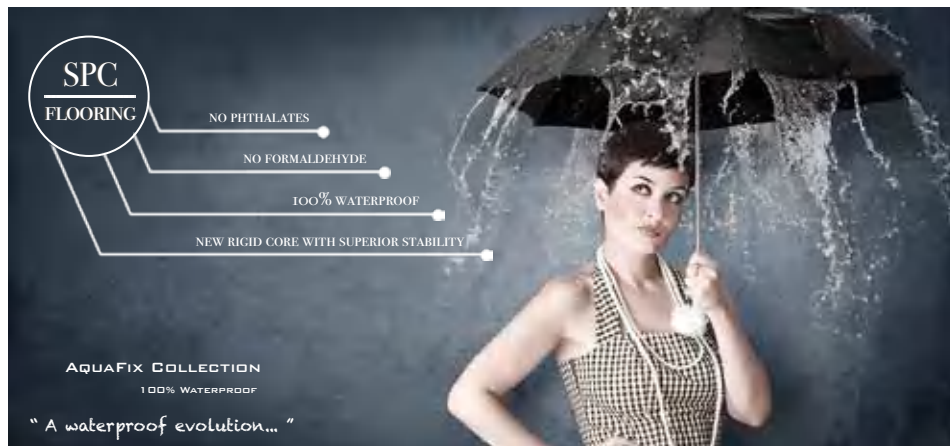

Thickness: 1/4" (6.5mm) overall

Width: 8 5/8" (220 mm)

Length: 59 1/2" (1510mm)

Wear Layer : 12mil (0.3mm)

Finish: Matte

Surface: Light Brush
Texture Embossed

Package: 21.45 sqft/carton
52 cartons/pallet

Weight: 45.53 lb/carton
20.65 kg/carton



TULIP




DAISY



LILY



CHAMOMILE



IRIS




LAVENDER



BLUEBELL



CARNATION



MARIGOLD




PEONY

A WATERPROOF EVOLUTION




100% waterproof flooring




4-sided painted micro v-bevels create real parquet look



Ultra low VOCs



1.5mm pad attached



Formaldehyde free & phthalates free



Lifetime limited residential wear warranty
*Limited conditions apply



Uniclic® click system



Pet friendly



10 years limited commercial wear warranty
*Limited conditions apply




Light Brush Texture
Embossed Surface



Certified for underfloor heating system
*See installation manual for details



The most recognized
Indoor Air Quality
Certification

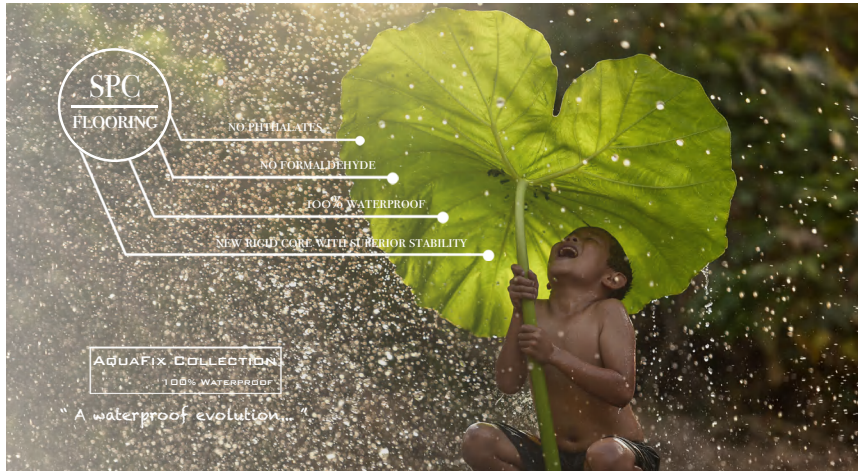

Thickness:	1/4"(6.5mm) overall 1.5mm pad attached
Wear layer:	12mil (0.3mm)
Width:	7 1/4" (183mm)
Length:	48" (1220mm)
Finish:	Matte
Surface:	Light brushed
Package:	19.22 sqft/carton 55 cartons/pallet
Weight:	19 kg/carton 42 lb/carton

COLOURS

ALLEGRO

ADAGIO


FORTE

TEMPO

LEGATO

STACCATO

FEATURES



4-sided painted micro v-bevels
create real parquet look



Formaldehyde free
& phthalates free




100% waterproof flooring



Ultra low VOCs



Pets welcome



Certified for underfloor
heating system



One of the most sophisticated
angle/ angle locking system



Lifetime limited residential wear
warranty



Light brushed texture embossed
surface




10 year limited commercial wear
warranty




Thickness:	1/4" (6mm) overall 1mm pad attached
Wear layer:	20mil (0.5mm)
Width:	9" (230mm)
Length:	71" (1800mm)
Finish:	Matte
Surface:	Registered embossed
Package:	22.28 sqft/carton 56 cartons/pallet
Weight:	21.5 kg/carton 47 lb/carton

COLOURS

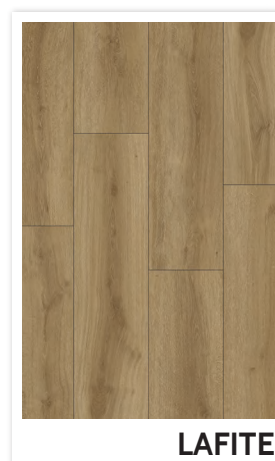

FEATURES



4-sided painted micro v-bevels
create real parquet look



100% waterproof flooring



Pets welcome



One of the most sophisticated
angle/ angle locking system



Authentic touch
Registered embossed texture



Formaldehyde free
& phthalates free



Ultra low VOCs



Certified for underfloor
heating system



Lifetime limited residential wear
warranty
*Limited conditions apply



15 year limited commercial wear
warranty
*Limited conditions apply




Thickness:	1/4" (6.5mm) overall 1.5mm pad attached
Wear layer:	20mil (0.5mm)
Width:	9" (230mm)
Length:	71" (1800mm)
Finish:	Matte
Surface:	Registered embossed
Package:	22.28 sqft/carton 56 cartons/pallet
Weight:	21.5 kg/carton 47 lb/carton

COLOURS



FEATURES



4-sided painted micro v-bevels
create real parquet look



100% waterproof flooring



1.5mm pad attached



One of the most sophisticated
fold-down style interlocking
system



Authentic touch
Registered embossed texture



Formaldehyde free
& phthalates free



Ultra low VOCs



Certified for underfloor
heating system



Lifetime limited residential wear
warranty



15 year limited commercial wear
warranty


















Thickness:	5/16" (8mm) overall 1.5mm pad attached
Wear layer:	20mil (0.5mm)
Width:	9" (225mm)
Length:	71" (1800mm)
Finish:	Matte
Surface:	Registered embossed
Package:	17.44 sqft/carton 52 cartons/pallet
Weight:	22.59 kg/carton 49.6 lb/carton

COLOURS



FEATURES

 8 Pattern Rotation	x8 8 pattern rotation enables an authentic natural wood look	 Registered Embossed	Authentic touch Registered embossed texture	 8mm Overall Thickness	Extra core thickness allows better comfort underfoot and performance
 4 Sided Bevelled	4-sided painted micro v-bevels create real parquet look	 Pet Friendly	Pet friendly	 No Formaldehyde	Formaldehyde free & phthalates free
 Waterproof	100% waterproof flooring	 Ultra Low VOCs	Ultra low VOCs	 Lifetime Limited Residential Warranty	Lifetime limited residential wear warranty
 Pad Attached	1.5mm pad attached	 Underfloor Heating	Certified for underfloor heating system <i>*See installation manual for details</i>	 15 Years Commercial Warranty	15 year limited commercial wear warranty
 UNICLIC	Uniclic® click system	 A+ VOC Level	A+ VOC level on scale from A+ to C Details: www.eurofins.com	 floor score	The most recognized Indoor Air Quality Certification

AQUAFIX COLLECTION

GRAND CRU CHEVRON (WPC)



A Classic that
never ages...

Thickness: 5/16" (8mm) overall
1.5mm pad attached

Width: 12" (305 mm)

Length: 28 1/4" (718mm)

Finish: Matte

Surface: Register Embossed Texture

Package: 18.83 sf/box

52 boxes/pallet

Weight: 33.20 lb/carton

15.06 kg/box



CHAMBERTIN
(CHEVRON)



SAINT-PIERRE
(CHEVRON)



LARROSE
(CHEVRON)



LASCOMBES
(CHEVRON)



BARTON
(CHEVRON)



ROCHEBELLE
(CHEVRON)



CHAUVIN
(CHEVRON)



CORBIN
(CHEVRON)




MONTLISSE
(CHEVRON)



LE GAY
(CHEVRON)

FEATURES



Chevron

Design for chevron
pattern installation



Underfloor
Heating


Certified for underfloor
heating system

*See installation manual for details



Waterproof

100% waterproof flooring



4
Sided Bevelled

4-sided painted micro
v-bevels create real
parquet look



Pad Attached

1.5mm pad attached



LIFE
TIME
Residential
Warranty

Lifetime limited residential
wear warranty

*Limited conditions apply



5G
Licensed by
Villinge

One of the most
sophisticated fold-down
style interlocking system



Registered
Embossed

Authentic touch
registered embossed
texture




Pet Friendly

Pet friendly



Ultra
Low
VOCs
ULTRA LOW VOCs

Ultra low VOCs

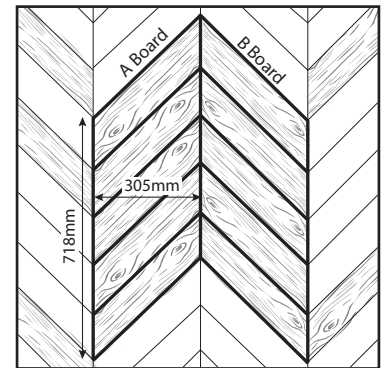

15
YEARS
Commercial
Wear Warranty

15 years limited
commercial wear warranty
*Limited conditions apply



Thickness: 1/4"(6.5mm) overall
1.5mm pad attached

Wear Layer: 20mil (0.5mm)

Width: 12" (305 MM)

Length: 24" (610MM)

Finish: Matte

Surface: Concrete texture embossed

Package: 20 sqft/carton
48 cartons/pallet

Weight: 41.89 lb/carton



BIANCO CARRARA



DOVE NOVA



MICABELLA




CLASSICO CARRARA




LIMESTONE



LOFT




CONCRETE



ONYX



MILANO



NERO

FEATURES



4-sided unilin grout line technology creating an authentic tile look



100% waterproof flooring



1.5mm pad attached



Uniclic® click system



Concrete texture embossed surface



Pet friendly



Formaldehyde free & phthalates free



Ultra low VOCs



Certified for underfloor heating system
*See installation manual for details



Lifetime limited residential wear warranty
*Limited conditions apply




10 year limited commercial wear warranty
*Limited conditions apply



The most recognized Indoor Air Quality Certification.

SUPERIOR STABILITY & FLEXIBILITY
WITH HIGH-QUALITY MULTILAYER
LVT / FIBERGLASS ENGINEERING

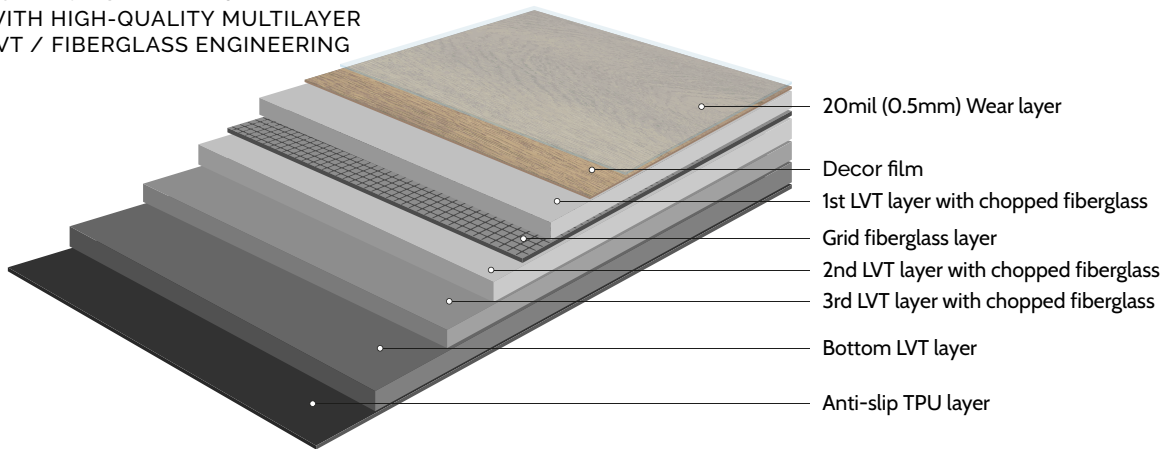


Thickness:	3/16" (5mm)
Wear layer:	20mil (0.5mm)
Width:	9" (228.6mm)
Length:	60" (1524mm)
Finish:	Matte
Surface:	Light brushed
Package:	22.5 sqft/carton 40 cartons/pallet
Weight:	22 kg/carton 48.5 lb/carton

COLOURS



FEATURES



4-sided micro bevels create real
parquet look



100% waterproof flooring



Light brushed texture embossed surface



Superior flexibility



Easy repairs



Excellent underfoot comfort



Formaldehyde free & phthalates free



Pet friendly



Certified for underfloor heating system
*See installation manual for details



30 years limited residential wear warranty



15 years limited commercial wear warranty



The most recognized Indoor Air Quality
Certification

LVP FLOORING TECHNICAL DATA

Technical Characteristic	Standards	Test Method	Verdict
Size, tolerance	A tolerance of $\pm 0.4\text{mm}/305\text{mm}$	ASTM F2055-17(2021)	Pass
Thickness, product	A tolerance of $\pm 0.13\text{mm}$	ASTM F386-17	Pass
Thickness, wear layer	Commercial, 0.5mm min	ASTM F410-08(2017)	Pass
Squareness	$\leq 0.25\text{mm}$	ASTM F2055-17(2021)	Pass
Residual indentation	Average $< 8\%$ Max. $\leq 10\%$	ASTM F1914-18	Pass
Flexibility	No crack or break when using $\Phi 25.4\text{mm}$ mandrel	ASTM F137-08(2018)	Pass
Dimensional stability	$\leq 0.51\text{mm}/305\text{mm}$ (0.17%)	ASTM F2199-20	Pass
Resistance to chemicals	No more than a slight change in surface dulling, surface attack, or staining	ASTM F925-13(2020)	Pass
Resistance to light	(avg, max) $\Delta E^* < 8$	ASTM F1515-21	Pass
Resistance to heat	(avg, max) $\Delta E^* < 8$	ASTM F1514-19	Pass
Effect of Castor Chair	Rotation frequency: 60r/min Abrasive wheels: CS-17 Load on each wheel: 1000g Test revolutions: 1000r	-	Pass
Abrasion/ Wear resistance	-	ASTM D4060-19	60mg
Fungi Resistance	-	ASTM G21-15	Rating 0, None growth
Heavy Metal	-	ASTM F963-17	Not Detected (less than the detection limit)
Phthalate Content Test (DBP/DEHP/BBP/DINP/DIBP/ DPENP/DHEXP/DCHP)	-	CPSC-CH-C1001-09.4	Not Detected (less than the detection limit)
Acoustic Impact Noise Recuction	-	ASTM E90-09 (R2016), ASTM E492-09 (R2016)	STC 62 / IIC 63
Thermal Conductivity	-	ASTM C518-21	0.139 W(m.K)
Thermal Resistance	-	-	0.036 (m2.K)/W
Specific Optical Density of Smoke	-	ASTM E662	< 450
Critical Radiant Flux	-	ASTM E648/ NFPA classification	Class 1

Product Construction

1 Urethane Coating With Ceramic Bead

A UV cured urethane coating and ceramic bead coating for enhanced durability, stain resistance and easy care & maintenance.

2 Clear Vinyl Wear Layer

Transparent vinyl wear layer provides excellent resistance to scuffs and abrasions.

3 Printed Decorative Film

High resolution printed film delivers vivid looks in wood, stone and abstracts.

4 Solid Vinyl Layers

Multiple layers of solid vinyl are hot pressed to form a solid layer.



Wood Pattern Plank


Dimension 7" x 48" x 2.5/0.5mm
177.8mm x 1219.2mm x 2.5/0.5mm

Wear layer 20mil (0.5mm)

Surface Light brushed

Package 37.33 sqft/carton
75 cartons/pallet

Weight 15.67 kg/carton
34.55 lb/carton

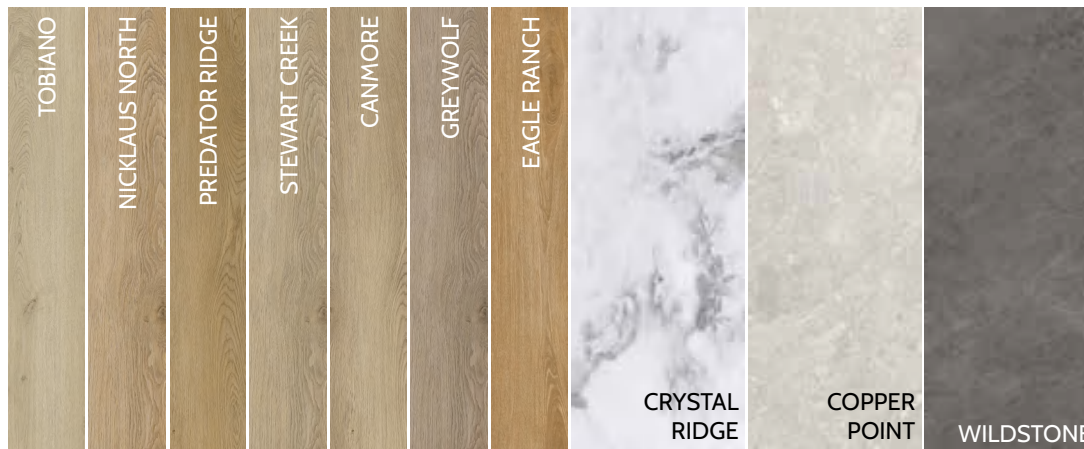

Tile Pattern Plank












Dimension 12" x 24" x 2.5/0.5mm
304.8mm x 609.6mm x 2.5/0.5mm

Wear layer 20mil (0.5mm)

Surface Coral embossed surface

Package 36 sqft/carton
66 cartons/pallet

Weight 15.1 kg/carton
33.3 lb/carton

 4 Sided Bevelled	4-sided micro bevels create real parquet look	 Superior Flexibility	Superior flexibility	 No Formaldehyde	Formaldehyde free & phthalates free	 30 YEARS Residential Warranty	30 year limited residential wear warranty
 Waterproof	100% waterproof flooring	 Fast Repairs	Easy repairs	 Pet Friendly	Pet friendly	 floor score	The most recognized Indoor Air Quality Certification
 Light Brushed	Light brushed texture embossed surface, matte finish	 Comfort Walk	Excellent underfoot comfort	 15 YEARS Commercial Warranty	15 year limited commercial wear warranty		

Characteristics	Test requirements	Test Method	Verdict
Size, tolerance	A tolerance of $\pm 0.4\text{mm}/305\text{mm}$	ASTM F2055-17(2021)	Pass
Thickness, product	A tolerance of $\pm 0.13\text{mm}$	ASTM F386-17	Pass
Thickness, wear layer	Commercial, 0.5mm min	ASTM F410-08(2017)	Pass
Squareness	$\leq 0.25\text{mm}$	ASTM F2055-17(2021)	Pass
Residual indentation	Average < 8% Max. $\leq 10\%$	ASTM F1914-18	Pass
Flexibility	No crack or break when using $\Phi 25.4\text{mm}$ mandrel	ASTM F137-08(2018)	Pass
Dimensional stability	$\leq 0.51\text{mm}/305\text{mm}$ (0.17%)	ASTM F2199-20	Pass
Resistance to chemicals	No more than a slight change in surface dulling, surface attack, or staining	ASTM F925-13(2020)	Pass
Resistance to light	(avg, max) $\Delta E^* < 8$	ASTM F1515-21	Pass
Resistance to heat	(avg, max) $\Delta E^* < 8$	ASTM F1514-19	Pass

Product Construction

1 Urethane Coating With Ceramic Bead

A UV cured urethane coating and ceramic bead coating for enhanced durability, stain resistance and easy care & maintenance.

2 Clear Vinyl Wear Layer

Transparent vinyl wear layer provides excellent resistance to scuffs and abrasions.

3 Printed Decorative Film

High resolution printed film delivers vivid looks in wood, stone and abstracts.

4 Solid Vinyl Layers

Multiple layers of solid vinyl are hot pressed to form a solid layer.



Wood Pattern Plank

Dimension 7" x 48" x 2.0/0.3mm
177.8mm x 1219.2mm x 2.0/0.3mm

Wear layer 12mil (0.3mm)

Surface Light brushed

Package 37.33 sqft/carton
75 cartons/pallet

Weight 12.80 kg/carton
28.22 lb/carton

COLOURS



Muskoka Bay



Mayfair Lake




Paradise Canyon



Sagebrush




Kananaskis

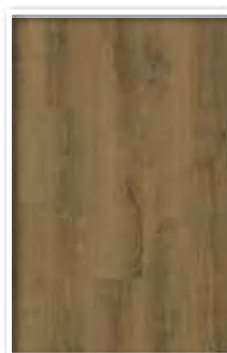

Cabot Cliffs

FEATURES



4 sided micro bevels create real parquet look



100% Waterproof Flooring




Meets LEED® v4.0 and v4.1 MR Credit



Light brushed texture embossed surface, matt finish



Superior Flexibility



Easy Repairs



Excellent underfoot comfort



Formaldehyde free & phthalates free



Pet friendly



25 years limited residential wear warranty
*Limited conditions apply



10 years limited light commercial wear warranty
*Limited conditions apply




The most recognized Indoor Air Quality Certification

LVT FLOORING TECHNICAL DATA

Technical Characteristic	Standards	Test Method	Verdict
Size, tolerance	A tolerance of $\pm 0.4\text{mm}/305\text{mm}$	ASTM F2055-17(2021)	Pass
Thickness, product	A tolerance of $\pm 0.13\text{mm}$	ASTM F386-17	2.0mm
Thickness, wear layer	Commercial, 0.5mm min	ASTM F410-08(2017)	0.3mm
Squareness	$\leq 0.25\text{mm}$	ASTM F2055-17(2021)	Pass
Residual indentation	Average $< 8\%$ Max. $\leq 10\%$	ASTM F1914-18	6.80%
Flexibility	No crack or break when using $\Phi 25.4\text{mm}$ mandrel	ASTM F137-08(2018)	Pass
Dimensional stability	$\leq 0.51\text{mm}/305\text{mm}$ (0.17%)	ASTM F2199-20	Pass
Resistance to chemicals	No more than a slight change in surface dulling, surface attack, or staining	ASTM F925-13(2020)	Pass
Resistance to light	(avg, max) $\Delta E^* < 8$	ASTM F1515-19	Pass
Resistance to heat	(avg, max) $\Delta E^* < 8$	ASTM F1514-21	Pass
Castor Chair Resistance	After 25000 cycles, no delamination shall occur. No disturbance to the surface other than a slight change in appearance.	NALFA/ANSI LF-11	Pass
Fungi Resistance	-	ASTM G21-15	Rating 0, None growth
Heavy Metal	-	ASTM F963-17	Not Detected (less than the detection limit)
Phthalate Content Test (DBP/DEHP/BBP/DINP/DIBP/ DPENP/DHEXP/DCHP)	-	CPSC-CH-C1001-09.4	Not Detected (less than the detection limit)
Acoustic Impact Noise Recuction	-	ASTM E90-09 (R2016), ASTM E492-09 (R2016)	STC 63 / IIC 54
Thermal Conductivity	-	ASTM C518-21	0.073 W(m.K)
Thermal Resistance	-	ASTM C518-21	0.028 (m2.K)/W
Specific Optical Density of Smoke	-	ASTM E662	< 450
Critical Radiant Flux	-	ASTM E648/ NFPA classification	Class 1



Thickness:	1/2" (12mm)
Width:	7 3/4" (195mm)
Length:	59 7/16" (1515mm)
Finish:	Matte
Surface:	EIR Surface
Package:	22.25 sqft/carton 50 cartons/pallet
Weight:	48.5 lb/carton

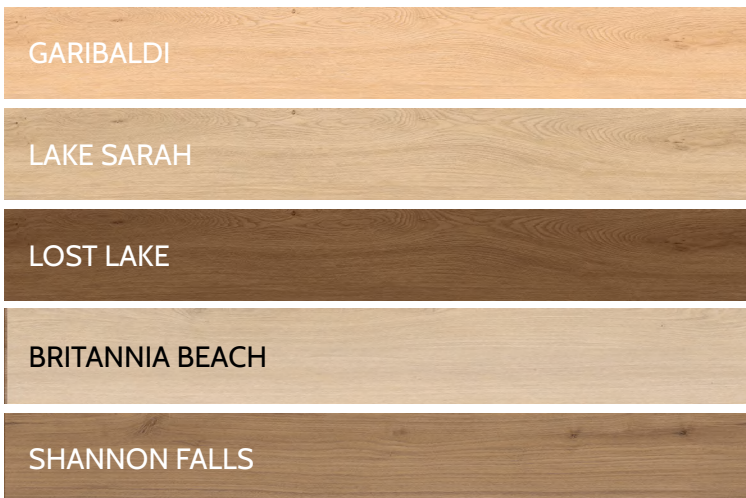

THE WATER RESISTANT GENERATION OF LAMINATE FLOORING



Advanced water-resistant HDF core, tested by Benchmark International surface water test.




AquaFix sealant on four edges to achieve better water resist performance.




*Up to 100 hours surface top-down water resistance, with AquaFix HDF Core, edge sealant on four sides, self-enclosed lock.

*Visit www.unifloor.ca for details.




Easiest fold down interlocking system



Abrasive Class 4, for intense use in habitable rooms with high traffic intensity, public utility with normal traffic intensity.



True Touch synchronized grain texture, reveals the authentic look of real wood.





Thickness:	1/2" (12mm)
Width:	7 3/4" (196mm)
Length:	72" (1830mm)
Finish:	Matte
Surface:	EIR Surface
Package:	23.16 sqft/carton 40 cartons/pallet
Weight:	50.7 lb/carton



THE WATER RESISTANT GENERATION OF LAMINATE FLOORING




Advanced water-resistant HDF core, tested by Benchmark International surface water test.




AquaFix sealant on four edges to achieve better water resist performance.



*Up to 100 hours surface top-down water resistance, with AquaFix HDF Core, edge sealant on four sides, self-enclosed lock. *Visit www.unifloor.ca for details.




Easiest fold down interlocking system



Abrasive Class 4, for intense use in habitable rooms with high traffic intensity, public utility with normal traffic intensity.



True Touch synchronized grain texture, reveals the authentic look of real wood.



ROYAL SERIES



The Water Resistant
Generation of
Laminate Flooring

AQUAFIX®

Thickness:	1/2" (12mm)
Width:	9 7/16" (239mm)
Length:	86 5/8" (2200mm)
Finish:	Matte
Surface:	EIR Surface
Package:	22.64 sqft/carton 44 cartons/pallet
Weight:	50.5 lb/carton



ELIZABETH



PHILIP



ANNE



WILLIAM



KATE



HARRY



MEGHAN



CHARLES



DIANA



ANDREW

THE WATER RESISTANT GENERATION OF LAMINATE FLOORING



Advanced water-resistant HDF core, tested by Benchmark International surface water test.




AquaFix sealant on four edges to achieve better water resist performance.



*Up to 100 hours surface top-down water resistance, with AquaFix HDF Core, edge sealant on four sides, self-enclosed lock.
*Visit www.unifloor.ca for details.




One of the most sophisticated fold-down style interlocking system.



Abrasive Class 4, for intense use in habitable rooms with high traffic intensity, public utility with normal traffic intensity.




True Touch synchronized grain texture, reveals the authentic look of real wood.





THICKNESS:	1/2" (12.3MM)
WIDTH:	6-1/2" (165MM)
LENGTH:	48" (1215MM)
FINISH:	SEMI-GLOSS
SURFACE:	NATURAL WOOD GRAIN EMBOSSED
PACKAGE:	23.74 SQFT/CARTON 42 CARTONS/PALLET
WEIGHT:	48 LB/CARTON

COLOURS

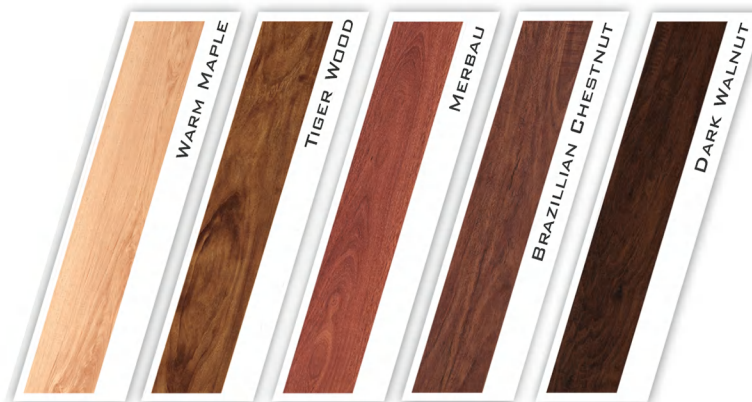

FEATURES



4 SIDES MICRO BEVELLED



25 YEARS LIMITED RESIDENTIAL WEAR WARRANTY
5 YEARS LIMITED COMMERCIAL WEAR WARRANTY



FORMALDEHYDE CLASS E1:
≤ 0.124 MG/M³ AIR
TESTED BY SGS-CSTC STANDARDS TECHNICAL SERVICES



EASIEST FOLD DOWN INTER-LOCKING SYSTEM



ANTI BACTERIAL COATING



ABRASSIVE CLASS 3



12MM HDF CORE



CERTIFIED FOR UNDERFLOOR HEATING SYSTEM

